

Agilent 86105B 15 GHz Optical and 20 GHz Electrical Plug-In Module

Test a wide variety of telecom and datacom transmission rates with the 86105B multi-rate compliance filter module

The 86105B Infiniium DCA plugin module offers unprecedented optical filter coverage for SONET/ SDH and Datacom/Enterprise technologies from 155 Mb/s to 11.317 Gb/s. With the increased need to address the bottleneck concerns within the Enterprise and Telecom networks, network equipment elements and their components need to be engineered with flexibility, performance and cost in mind. The 86105B now allows designers and manufactures to test transmitter compliance and perform waveform characterization on multiple technologies and data rates with a single module.

Component/System Design and Manufacturing

The 86105B gives designers and manufacturers the ability to accurately characterize the transmission performance of components and systems that cross the boundary between Telecom (e.g. SONET/ SDH) and Datacom/Enterprise (e.g. Ethernet) technologies. Such examples would include 10 Gb/s 200/300 pin MSA transponders which may be designed to conform to different standards and different data rates. Also new devices being designed for emerging standards, such as Xenpaks for 10 Gb Ethernet or small form factor (SFF and SFP) transceivers for the OC-48 market.



TestWorld 250 Technology Way Rocklin, CA 95765

1-855

Click to go www.TestWorld.com

OC-192 SONET transmission has various specified rates depending on the technology being implemented and the network being designed. The OC-192 rate is 9.953 Gb/s. The rate goes up to 10.664 Gb/s with the addition of Forward Error Correction (FEC). In addition there is now OTN G.709, which adds additional network control and further increases the rate to 10.71 Gb/s. To meet this increased transmission speed, components must scale and be tested accordingly.

Specifications (Preliminary)


| Bandwidth | 15 GHz Optical and 20 GHz Electrical |
|-------------|---|
| Wavelength | 1000–1600 nm |
| Sensitivity | –12 dBm |
| (typical) | |
| RMS noise | 5 μW |
| Fibre Input | Single Mode |

Unprecedented Filter Rate Coverage

| Data Rate | Standard | Option 86105B-111 | Option 86105B-112 | Option 86105B-113 |
|--|--|---------------------------------|---------------------------------|----------------------------|
| 155 Mb/s 622 Mb/s | 0C-3 0C-12 | | X X | |
| 1063 Mb/s 1250 Mb/s | Fibre Channel GbE | | | X X |
| 2125 Mb/s 2488 Mb/s 2500 Mb/s 2500 Mb/s 2666 Mb/s | 2x Fibre Channel OC-48 2xGbE InfiniBand OC-48 (FEC) | | X X X X | X X X X |
| 9.953 Gb/s 10.3125 Gb/s 10.51875 10.664 Gb/s 10.709 Gb/s 11.096 Gb/s 11.317 Gb/s | OC-192 10GbE 10xFibre Channel OC-192 (FEC) OC-192 (ITU-TG.709) 10GbE 10G Fibre Channel | X X X X X X X | X X X X X X X | X X X X X X |



In the midst of increasing SONET/ SDH rates, new Datacom/Enterprise standards are emerging such as 10 Gb Ethernet and 10X Fibre Channel, which run at 10.3125 Gb/s and 10.51875 Gb/s respectively. Switching and routing systems are required to interface some of these technologies (specifically the IEEE 802.3 Ethernet standards and SONET) at varying rates. Therefore, the ability to test and characterize performance across a wide range of technologies and data-rates is essential in the R&D and manufacturing environments. Multi-port and multi-rate system/component designers and manufactures can take advantage of both the wide filter coverage and -12 dBm sensitivity of the 86105B. With this module it is now possible to characterize optical transmission performance of all SONET, Ethernet, and Fibre Channel technologies, from 155 Mb/s through to 10 Gb/s. In addition, new Infiniium DCA 86100A/ B firmware now supports mask testing for emerging standards such as optical InfiniBand and electrical XAUI signaling.

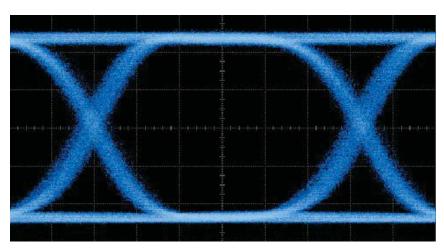

86105B 15 GHz Opt. bandwidth sensitivity spec: -12 dBm at 1310 nm

🔁 Agilent Email Updates

www.agilent.com/find/emailupdates Get the latest information on the products and applications you select.

lent Direct

www.agilent.com/find/agilentdirect Quickly choose and use your test equipment solutions with confidence.



www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone

| Americas | | |
|---------------------------|-------------------------|--|
| Canada | (877) 894-4414 | |
| Latin America | 305 269 7500 | |
| United States | (800) 829-4444 | |
| Asia Pacific | | |
| Australia | 1 800 629 485 | |
| China | 800 810 0189 | |
| Hong Kong | 800 938 693 | |
| India | 1 800 112 929 | |
| Japan | 81 426 56 7832 | |
| Korea | 080 769 0800 | |
| Malaysia | 1 800 888 848 | |
| Singapore | 1 800 375 8100 | |
| Taiwan | 0800 047 866 | |
| Thailand | 1 800 226 008 | |
| Europe | | |
| Austria | 0820 87 44 11 | |
| Belgium | 32 (0) 2 404 93 40 | |
| Denmark | 45 70 13 15 15 | |
| Finland | 358 (0) 10 855 2100 | |
| France | 0825 010 700 | |
| Germany | 01805 24 6333* | |
| | *0.14€/minute | |
| Ireland | 1890 924 204 | |
| Italy | 39 02 92 60 8484 | |
| Netherlands | 31 (0) 20 547 2111 | |
| Spain | 34 (91) 631 3300 | |
| Sweden | 0200-88 22 55 | |
| Switzerland | (French) | |
| | 44 (21) 8113811 (Opt 2) | |
| Switzerland | (German) | |
| | 0800 80 53 53 (Opt 1) | |
| United Kingdom | 44 (0) 7004 666666 | |
| Other European countries: | | |
| | | |

www.agilent.com/find/contactus Revised: March 23, 2007

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2001, 2008 Printed in USA, April 25, 2008 5988-6929EN

