

# Agilent E7400A Series EMC Analyzers

## Data Sheet

These specifications apply to the Agilent Technologies E7402A and E7405A EMC analyzers.

### Frequency Specifications

#### Frequency range

##### E7402A

dc coupled	100 Hz <sup>1</sup> to 3.0 GHz
ac coupled	100 kHz <sup>1</sup> to 3.0 GHz

##### E7405A

Band	LO harmonic = N	
0	1-	dc coupled 30 Hz <sup>1</sup> to 3.6 GHz
		ac coupled 100 MHz to 3.6 GHz
1	1-	2.85 GHz to 6.7 GHz
2	2-	6.2 GHz to 13.2 GHz
3	4-	12.8 GHz to 19.2 GHz
4	4-	18.7 GHz to 26.5 GHz

#### Frequency reference


Aging	$\pm 1 \times 10^{-7}$ /year
Temperature stability	$\pm 1 \times 10^{-8}$
Settability	$\pm 1 \times 10^{-8}$

#### Frequency readout accuracy

(start, stop, center, marker)  $\pm$ (frequency indication  
x frequency reference error<sup>2</sup>  
+ span accuracy + 15% of RBW  
+ 10 Hz) + 1 Hz x N<sup>3</sup>

### Specifications

All specifications apply over 0 °C to +55 °C unless otherwise noted and are covered by the product warranty. The analyzer will meet its specifications when: it's within the one year calibration cycle, AUTO ALIGN [ALL] is selected, stored a minimum 2 hours within the operating temperature range, turned on for at least 5 minutes, and Align Now RF has been run once every 24 hour period. Typical performance describes the level at which 80% of the units will meet or exceed with a 95% confidence level over 20 to 30 °C, but is not covered in the product warranty. Characteristics describe expected product performance levels that are not covered in the product warranty.

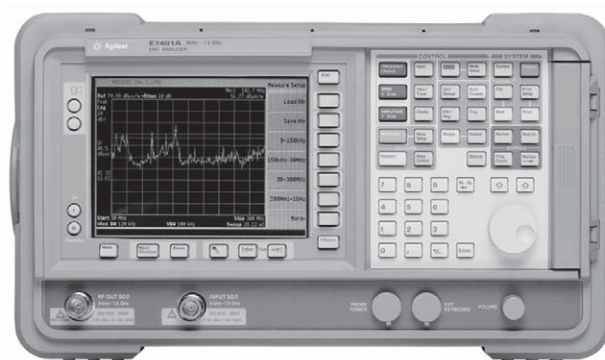

1. Usable to 30 Hz

2. Frequency reference error = (aging rate x period of time since adjustment + settability + temperature stability)

3. N = LO harmonic mixing mode

More Application, Information, and Pricing available at:



250 Technology Way  
Rocklin, CA 95765

sales@testworld.com  
1-855-200-TEST (8378)

Click to go [www.TestWorld.com](http://www.TestWorld.com)



**Agilent Technologies**

### Marker frequency counter<sup>1</sup>

Accuracy <sup>2</sup>	$\pm(\text{marker frequency} \times \text{frequency reference error}^3 + \text{counter resolution})$
Counter Resolution	Selectable from 1 Hz to 100 kHz

### Frequency span

Range	0 Hz (zero span), 100 Hz x N <sup>4</sup> to the range of the spectrum analyzer
Resolution	2 Hz x N <sup>4</sup>
Accuracy	(> 2000 sweep points)
Sweep type linear	$\pm 0.5\%$ of span
Sweep type log	$\pm 2\%$ of span (characteristic)

### Sweep time

Range	
Span > 0 Hz	1 ms to 4000 s
Span = 0 Hz	50 ns <sup>5</sup> to 4000 s
Accuracy	$\pm 1\%$
Sweep trigger	Free run, single, line, video, external, delay, offset, and gate (Option 1D6)
Delay trigger range	1 $\mu$ s to 400 s

### Sweep (trace) point range

	101 to 8192
Span = 0 Hz	2 to 8192

**Resolution bandwidth** 1 Hz to 3 MHz (–3 dB) in 1-3-10 sequence<sup>6</sup>  
5 MHz (–3 dB) bandwidth  
200 Hz<sup>6</sup>, 9 kHz, 120 kHz, 1 MHz (–6 dB) EMI bandwidths  
1 MHz (impulse) EMI bandwidth


Accuracy	
1 Hz to 300 MHz (–3 dB)	$\pm 10\%$
1 kHz to 3 MHz (–3 dB)	$\pm 15\%$
5 MHz (–3 dB)	$\pm 30\%$
200 Hz (–6 dB)	$\pm 10\%$
9 kHz to 120 kHz (–6 dB)	$\pm 20\%$
1 MHz (–6 dB)	$\pm 10\%$
1 MHz (impulse)	$\pm 15\%$

Selectivity (characteristic)	
10 Hz to 300 Hz (–3 dB)	< 5:1 (–60 dB/–3 dB) (Digital, approximately Gaussian-shaped)
1 kHz to 3 MHz (–3 dB)	< 5:1 (–60 dB/–3 dB) (approximately Gaussian-shaped)
200 Hz (–6 dB)	< 3:1 (–40 dB/–6 dB) (Digital, Kaiser Windows)
9 kHz, 120 kHz, 1 MHz (–6 dB)	< 10:1 (–60 dB/–6 dB) (approximately Gaussian-shaped)
1 MHz (impulse)	< 10:1 (–60 dB/–6 dB) (approximately Gaussian-shaped)

**Video bandwidth range** 30 Hz to 3 MHz<sup>7</sup> in 1-3-10 sequence  
1, 3, 10 Hz for RBWs < 1 kHz

### Stability

Noise sidebands (1 kHz RBW, 30 Hz VBW and sample detector)

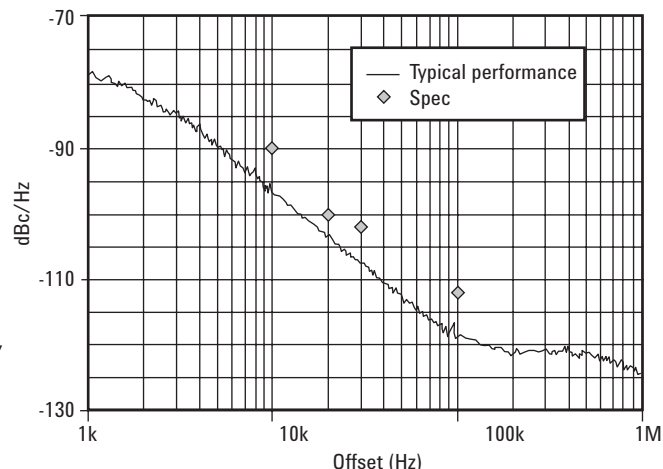

### Stability specifications

	Specified	Typical
$\geq 1$ kHz	na	–78 dBc/Hz <sup>8</sup>
$\geq 10$ kHz	$\leq -90$ dBc/Hz <sup>8</sup>	–94 dBc/Hz <sup>8</sup>
$> 20$ kHz	$\leq -100$ dBc/Hz <sup>8</sup>	–105 dBc/Hz <sup>8</sup>
$> 30$ kHz	$\leq -106$ dBc/Hz <sup>8</sup>	–112 dBc/Hz <sup>8</sup>
$> 100$ kHz	$\leq -118$ dBc/Hz <sup>8</sup>	–122 dBc/Hz <sup>8</sup>
$> 1$ MHz	$\leq -125$ dBc/Hz <sup>8</sup>	–127 dBc/Hz <sup>8</sup>
$> 5$ MHz	$\leq -127$ dBc/Hz <sup>8</sup>	–129 dBc/Hz <sup>8</sup>
$> 10$ MHz	$\leq -131$ dBc/Hz <sup>8</sup>	–136 dBc/Hz <sup>8</sup>

### Residual FM

1 kHz RBW, 1 kHz VBW	$\leq 100 \times N^4$ Hz pk-pk in 100 ms
10 Hz RBW, 10 Hz VBW	$\leq 2 \times N^4$ Hz pk-pk in 20 ms

### System-related sidebands

$\geq 30$  kHz offset from CW signal  $\leq -65$  dBc + 20 Log N<sup>4</sup>

1. Not available in RBW < 1 kHz
2. Marker level to DANL > 25 dB, Span  $\leq 1.5$  GHz, RBW/Span  $\geq 0.002$
3. Frequency reference error = (aging rate x period of time since adjustment + settability + temperature stability)
4. N = LO harmonic mixing mode
5. RBW  $\geq 1$  kHz, 2 sweep points
6. 1 Hz to 300 Hz are only available in spans of  $\leq 5$  MHz. This bandwidth is not usable when the tracking generator is turned on (Option 1DN).
7. Characteristic
8. Add 20 log(N) for frequencies > 6.7 GHz.

**Amplitude specifications****Amplitude range**

Measurement range	Displayed average noise level (DANL) to maximum safe input level
Input attenuator range	
E7402A	0 to 65 dB (75 dB <sup>1</sup> ), in 5 dB steps
E7405A	0 to 65 dB, in 5 dB steps

**Maximum safe input level**

Average continuous power	+30 dBm (1 W)
Peak pulse power	+50 dBm (100 W) (input attenuator ≥ 30 dB)
Maximum dc	0 Vdc (dc coupled) 50 V (ac coupled)

**1 dB gain compression** (total power at input mixer<sup>2</sup>)

≥ 50 MHz	0 dB
≥ 6.7 GHz	–3 dB
≥ 13.2 GHz	–5 dB

**Display range**

Log Scale	0.1, 0.2, 0.5 dB/division and 1 to 20 dB/division in 1 dB steps; ten divisions displayed
RBW ≥ 1 kHz	0 to –85 dB from reference level is calibrated
RBW ≤ 300 Hz	0 to –120 <sup>5</sup> dB from reference level is calibrated
Linear scale	10 divisions
Scale units	dBm, dBmV, dBμV, dBμA, Amps, Volts and Watts

**Marker readout resolution**

Log scale	
0 to –85 dB	0.04 dB
0 to –120 (RBW ≤ 300 Hz)	0.04 dB
Linear scale	0.01% of reference level

## Fast sweep times for zero span (Option AYX)

Log Scale, 0 to –85 dB	0.3 dB
Linear	0.3 % of reference level

**Display average noise level (DANL)**

	1 kHz RBW	10 Hz RBW	1 kHz w/preamp on	10 Hz w/preamp on, typical	1 Hz w/preamp on, typical
<b>E7402A</b>					
30 Hz to 9 kHz <sup>3</sup>	na	≤ –93	na	na	na
9 kHz to 100kHz <sup>3</sup>	na	≤ –109	na	na	na
100 kHz to 1 MHz <sup>3</sup>	na	≤ –135	na	na	na
1 MHz to 10 MHz <sup>3</sup>	≤ –117	≤ –136	na	≤ –152	≤ –162
10 MHz to 1 GHz	≤ –117	≤ –136	≤ –152 <sup>4</sup>	≤ –156	≤ –166
1 GHz to 2 GHz	≤ –116	≤ –135	≤ –153 <sup>4</sup>	≤ –156	≤ –166
2 GHz to 3 GHz	≤ –114	≤ –133	≤ –151 <sup>4</sup>	≤ –154	≤ –164
<b>E7405A</b>					
30 Hz to 9 kHz <sup>3</sup>	na	≤ –93	na	na	na
9 kHz to 100kHz <sup>3</sup>	na	≤ –109	na	na	na
100 kHz to 1 MHz <sup>3</sup>	na	≤ –135	na	na	na
1 MHz to 10 MHz <sup>3</sup>	≤ –117	≤ –137	na	≤ –155	≤ –165
10 MHz to 1 GHz	≤ –116	≤ –135	≤ –151 <sup>4</sup>	≤ –157	≤ –167
1 GHz to 2 GHz	≤ –116	≤ –131	≤ –151 <sup>4</sup>	≤ –155	≤ –165
2 GHz to 3 GHz	≤ –112	≤ –131	≤ –149 <sup>4</sup>	≤ –152	≤ –162
3 GHz to 6 GHz	≤ –112	≤ –131	na	na	na
6 GHz to 12 GHz	≤ –111	≤ –130	na	na	na
12 GHz to 22 GHz	≤ –107	≤ –126	na	na	na
22 GHz to 26.5 GHz	≤ –106	≤ –125	na	na	na

1. Characteristic

2. Mixer power level (dBm) = input power (dBm) – input attenuator (dB)

3. Typical

4. 0 to 50 dB for RBWs ≤ 300 Hz and span = 0 Hz, or when auto ranging is off, or 0 to 30 dB for RBW = 200 Hz.

5. 0 to –70 dB range when span = 0 Hz, when RBW = 200 Hz, or when IF gain is fixed.

Frequency response	(10 dB input attenuation)		
	Absolute <sup>1</sup>	Typical	Relative flatness <sup>2</sup>
30 Hz to 3 GHz <sup>3</sup>	±0.5 dB	na	±0.5 dB
3.0 GHz to 6.7 GHz	±1.5 dB	±0.39 dB	±1.3 dB
6.7 GHz to 13.2 GHz	±2.0 dB	±0.68 dB	±1.8 dB
13.2 GHz to 26.5 GHz	±2.0 dB	±0.86 dB	±1.8 dB

#### Input attenuation switching uncertainty at 50 MHz

Attenuation setting

0 dB to 5 dB	±0.3 dB
10 dB	Reference
15 dB	±0.3 dB
20 to 65 dB	±(0.1 dB + 0.01 x attenuator setting)

#### Absolute amplitude accuracy

#### Typical

At reference settings <sup>4</sup>	±0.34 dB	±0.13 dB
Preamp on <sup>5</sup>	±0.37 dB	±0.14 dB
Overall amplitude accuracy <sup>6</sup>	±(0.54 dB + absolute frequency response)	

#### RF input VSWR<sup>3</sup> (at tuned frequency, 10 dB attenuation)

E7402A

100 Hz to 100 kHz 1.1:1

100 kHz to 3 GHz 1.4:1

E7405A

100 Hz to 100 kHz 1.1:1

100 kHz to 6.7 GHz 1.3:1

6.7 GHz to 13.2 GHz 1.5:1

13.2 GHz to 22 GHz 2:1

22 GHz to 26.5 GHz 2.2:1

#### Resolution bandwidth switching uncertainty

(Referenced to 1 kHz RBW, at reference level)

10 Hz to 3 MHz RBW	±0.3 dB
5 MHz RBW	±0.6 dB
10 Hz to 300 Hz RBW	±0.3 dB

#### Reference level

Range	–149 dBm to max. mixer level + attenuator setting
Resolution	
Log scale	±0.1 dB
Linear scale	±0.12% of reference level
Accuracy (reference level – attenuator setting + preamp gain)	±0.3 dB (–10 dBm to –60 dBm) ±0.5 dB (–60 dBm to –85 dBm) ±0.7 dB (–85 dBm to –90 dBm)

#### Display scale fidelity

Log maximum cumulative  
RBW ≥ 1 kHz

dB below reference level	Typical	
0 dB (reference)	±0.00 dB	±0.00 dB
> 0 dB to 10 dB	±0.3 dB	±0.08 dB
> 10 dB to 20 dB	±0.4 dB	±0.09 dB
> 20 dB to 30 dB	±0.5 dB	±0.10 dB
> 30 dB to 40 dB	±0.6 dB	±0.23 dB
> 40 dB to 50 dB	±0.7 dB	±0.35 dB
> 50 dB to 60 dB	±0.7 dB	±0.35 dB
> 60 dB to 70 dB	±0.8 dB	±0.39 dB
> 70 dB to 80 dB	±0.8 dB	±0.46 dB
> 80 dB to 85 dB	±1.15 dB	±0.79 dB
RBW ≤ 300 Hz (span > 0 Hz)		
0 dB to 98 dB	±(0.3 dB + 0.01 x dB from reference level)	
≥ 98 dB to 120 dB	±(2.0 dB from reference level) <sup>3</sup>	
Log incremental accuracy		
0 dB to 80 dB <sup>7</sup>	±0.4 dB/4 dB from reference level	
Linear accuracy	± 2% of reference level	

**Linear to log switching** ±0.15 dB at reference level

1. Referenced to 50 MHz amplitude reference (20 °C to 30 °C)
2. Reference to midpoint between highest and lowest frequency response deviations. (20 °C to 30 °C)
3. Characteristic
4. Reference level –20 dBm; input attenuation 10 dB; center frequency 50 MHz; RBW 1 kHz; VBW 1 kHz; scale linear or log; span 2 kHz; sweep time coupled, sample director, signal at reference level.
5. 1 Hz to 300 Hz are only available in spans of ≤ 5 MHz and are not usable with tracking generator Option 1DN.
6. For reference levels 0 to 50 dBm; input attenuation 10 dB; dc coupled; RFW 1 kHz; VBW 1 kHz; scale loge range 0 to –50 dB from reference level; sweep time coupled; signal input 0 to 50 dB; spsn ≤ 20 kHz.
7. 0 to 50 dB for RBWs ≤ 300 Hz and span = 0 Hz, or when auto ranging is off, or 0 to 30 dB for RBW = 200 Hz.

## Spurious responses

### Second harmonic distortion

10 MHz to 500 MHz	< -65 dBc for -30 dBm tone at input mixer <sup>1</sup>
500 MHz to 1.5 GHz	< -75 dBc for -30 dBm tone at input mixer <sup>2</sup>
1.5 GHz to 2.0 GHz	< -85 dBc for -10 dBm tone at input mixer <sup>2</sup>
> 2.0 GHz	< -100 dBc for -10 dBm tone at input mixer <sup>1</sup> (or below displayed average noise level)

### Third order intermodulation distortion

100 MHz to 6.7 GHz	< -85 dBc for two -30 dBm tones at input mixer <sup>1</sup> and > 50 kHz separation
> 6.7 GHz	< -75 dBc for two -30 dBm tones at input mixer <sup>1</sup> and > 50 kHz separation

### Other input related spurious

	< -65 dBc, for -20 dBm tone at input mixer <sup>1</sup>
--	---

### Residual responses (input terminated and 0 dB attenuation)

150 kHz to 6.7 GHz	< -90 dBm
--------------------	-----------

### Amplitude ref. output

Amplitude	-20 dBm (nominal)
-----------	-------------------

### FM demodulation <sup>3</sup>

Input level	-60 dBm + attenuator setting
Signal level	0 to -30 dB below reference level

### Quasi-peak detector specifications

The EMC analyzer displays the quasi-peak amplitude of a pulse radio frequency on continuous wave signals. Amplitude response conforms with Publication 16 of Comité International Spécial des Perturbations Radioélectrique (CISPR) Section 1, Clause 2, as indicated in the relative quasi-peak response table.

### Relative quasi-peak response to a CISPR pulse (dB)

Pulse repetition frequency (Hz)	120 kHz EMI BW .03 to 1 GHz	9 kHz EMI BW 0.150 to 30 MHz	200 Hz EMI BW 9 kHz to 150 kHz
1000	+8.0 ±1.0	+4.5 ±1.0	—
100	0 dB reference <sup>4</sup>	0 dB reference <sup>4</sup>	+4.0 ±1.0
60	—	—	+3.0 ±1.0
25	—	—	0 dB reference <sup>4</sup>
20	-9.0 ±1.0	-6.5 ±1.0	—
10	-14 ±1.5	-10.0 ±1.5	-4.0 ±1.0
5	—	—	-7.5 ±1.5
2	-26 ±2.0	-20.5 ±2.0	-13.0 ±2.0
1	—	-22.5 ±2.0	-17.0 ±2.0
Isolated pulse	—	-23.5 ±2.0	-19.0 ±2.0

### General specifications

#### Temperature range

Operating	0° C to +55° C
Storage	-40° C to +75° C

#### EMI compatibility

Conducted and radiated emissions is in compliance with CISPR Pub. 11/1990 Group 1 Class B<sup>5</sup>

#### Audible noise

< 40 dBA pressure and  
< 4.6 Bels power (ISODP7779)

#### Military specification

Type tested to the environmental specifications of MIL-PRF-28800F, class 3

#### Power requirements

ON (line1)	90 to 132 V rms, 47 to 440 Hz 195 to 250 V rms, 47 to 66 Hz Power consumption < 300 W Power consumption < 5 W
Standby (line 0)	
DC operation	
Voltage	12 to 20 Vdc
Power consumption	< 200 W

### Measurement speed

	E7402A	E7405A
Local measurement rate <sup>6</sup>	≥ 45/sec	≥ 40/sec
Remote measurement as GPIB transfer rate <sup>7</sup>	≥ 45/sec	≥ 40/sec
RF center frequency tuning time <sup>8</sup>	≥ 75/ms	≥ 75/ms

#### Data storage (nominal)

Internal	200 traces <sup>9</sup> or states
External (floppy)	200 traces <sup>9</sup> or states

1. Mixer power level (dBm) = input power (dBm) - input attenuator (dB)

2. Not available in RBW < 1 kHz

3. Characteristic

4. Reference pulse amplitude accuracy relative a 66 µV CW signal < 1.5 dB as specified in CISPR Pub 16 CISPR reference pulse: 0.44 µVs for 30 MHz to 1 GHz, 0.316 µVs for 150 kHz to 30 MHz, 13.5 µVs for 9 kHz to 150 kHz

5. Meets Class A performance during dc operation or serial number US41110000 or lower.

6. Characteristic; factory preset, fixed center frequency, sweep points = 101 auto align off, RBW = 1 MHz, stop frequency ≤ 3 GHz, span > 10 MHz and ≤ 600 MHz.

7. Characteristic; factory preset, fixed center frequency, sweep points = 101 auto align off, RBW = 1 MHz, stop frequency ≤ 3 GHz, span = 20 MHz, GPIB interface, display and markers off, fixed center frequency, single sweep

8. Characteristic; includes center frequency tuning and measurement plus GPIB transfer times, stop frequency ≤ 3 GHz, sweep points = 101, display and markers off, single sweep

9. When storing a 401-point trace plus the instrument state

**Weight** (without options)

E7402A 14.9 kg (32.9 lbs.)

E7405A 17.1 kg (37.7 lbs.)

**Dimensions**

Without handle 222 mm(H) x 409 mm(D) x 373 mm(W)

With handle (max.) 222 mm(H) x 516 mm(D) x 416 mm(W)

**Inputs/outputs****Front panel connectors**Input 50  $\Omega$  type N (f)RF Out 50  $\Omega$  type N (f)**Probe power** +15 Vdc, –12.6 Vdc at 150 mA max. characteristic**Ext. keyboard** 6-pin mini-DIN, PC keyboards (for entering screen titles and file names)**Speaker** front-panel knob controls volume**Headphone** 3.5 mm (1/8 inch) miniature audio jack  
Power output 0.2 W into 4  $\Omega$ <sup>1</sup>**Amptd ref. output** 50  $\Omega$ , BNC (f)**Rear panel connectors****10 MHz ref out** 50  $\Omega$ , BNC (f), > 0 dBm<sup>1</sup>**10 MHz ref in** 50  $\Omega$ , BNC (f), –15 to +10 dBm<sup>1</sup>**Gate trig/ext. trig in** BNC (f), 5 V TTL**Gate hi swp out** BNC (f), 5 V TTL**VGA output** VGA compatible monitor, 15-pin D-SUB, (31.5 kHz horizontal, 60 Hz vertical sync rates, non-interlaced) Analog RGB 640 x 480**IF and sweep ports**Aux IF output BNC (f), 21.4 MHz, nominal –10 to –70 dBm<sup>1</sup> (uncorrected)Aux video out BNC (f), 0 to 1 V<sup>1</sup> (uncorrected)

Hi swp In BNC (f), low stops sweep (5 V TTL)

Hi swp out BNC (f), (5 V TTL)

Swp out BNC (f), 0 to +10 V<sup>1</sup> ramp**GPIO interface**

Standard (Option A4H) IEEE-488 bus connector

**Serial interface**

(Option 1AX) RS-232, 9-pin D-SUB (m)

**Parallel interface**

Standard 25-pin D-SUB (f), printer port only

---

1. Characteristic

## Option specifications

### Option 1DN tracking generator

**Frequency range** 9 kHz to 3.0 GHz

#### Output power level range

Range –2 to –66 dBm

Resolution 0.1 dB

Absolute accuracy  $\pm 0.75$  dB  
(at 50 MHz)

**Output vernier range** 8 dB

**Output attenuator range** 0 to 56 dB, 8 dB steps

#### Output flatness

9 kHz to 10 MHz  $\pm 3.0$  dB

10 MHz to 3.0 GHz  $\pm 2.0$  dB

#### Effective source match (characteristic)

0 dB attenuation < 2.0:1 (0 dB attenuation)

$\geq 8$  dB attenuation < 1.5:1 ( $\geq 8$  dB attenuation)

#### Spurious output

Harmonic spurs (–1 dBm output)

9 kHz to 3 GHz < –25 dBc

Non-harmonic spurs

9 kHz to 2 GHz < –27 dBc

2 GHz to 3 GHz < –23 dBc

**Dynamic range** Maximum output power –  
displayed average noise level

**Power sweep range** (–10 dBm to –1 dBm) –  
(source attenuator setting)

**Preamplifier (standard)** 1 MHz to 3 GHz  
(nominal gain 20 dB)



### Agilent Email Updates

**[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)**  
Get the latest information on the products and applications you select.



### Agilent Direct

**[www.agilent.com/find/agilentdirect](http://www.agilent.com/find/agilentdirect)**  
Quickly choose and use your test equipment solutions with confidence.



**[www.agilent.com/find/open](http://www.agilent.com/find/open)**  
Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

### Option ordering information

*ESA/EMC Spectrum Analyzer  
Configuration Guide*  
literature number 5968-3412E

## Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements. For information regarding self maintenance of this product, please contact your Agilent office.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

[www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)

**[www.agilent.com](http://www.agilent.com)**

**[www.agilent.com/find/EMC](http://www.agilent.com/find/EMC)**

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

**[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)**

### Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

### Europe & Middle East

Austria	01 36027 71571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	07031 464 6333**
	**0.14 €/minute
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:

**[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)**

Revised: August 14, 2008

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc.

2001, 2003 – 2005, 2008

Printed in USA, September 3, 2008

5968-3662E



**Agilent Technologies**